TexicanTM Tortilla Chip Serving Cabinets



The lower access door opens to form a shelf, easing the serving of chips into baskets and reducing breakage.

"El Primo" Model TCD-1

- 44 gallon capacity, that is equivalent to 9-10 warmer drawers.
- Stainless steel construction inside and out.
- **Just minutes to clean and maintain.**
- It's simple, just load the chips in the top, serve from the bottom.
- Thermostatic temperature control reduces operating costs.
 - **Customer satisfaction guaranteed.**



Serving cabinet shown with optional .250" thick anodized aluminum loading doors. A must for chain operators. Clear Lexan doors are standard equipment.

Rugged stainless steel construction with high density insulation means years of trouble free service.

The convection style controlled heating system maintains constant temperatures by moving heated air throughout the interior.

The entire front door assembly swings open for cleaning. Just unsnap the latches, remove the perforated interior bottom panel and wipe down the interior surfaces. Daily cleaning ensures fresh chips every day.




When the cabinet is mounted on our portable stand it gives the operator location options and mobility. (See Model TSS for size)

Serving satisfied customers since 1989. Simply better than the rest.

"El Primo" Model TCD-1

44 Gallon Chip Capacity

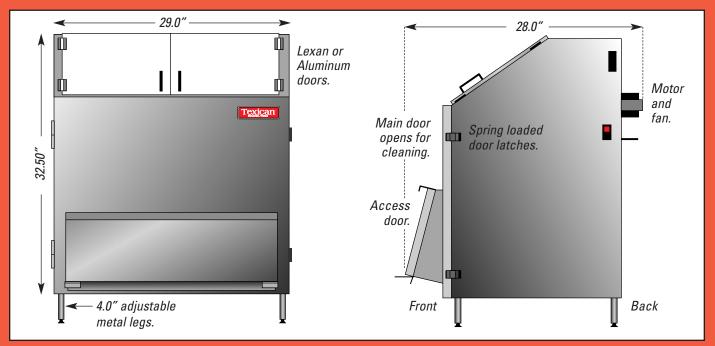

Option: .250 thick anodized aluminum loading doors. Portable stand: *(see Model TSS for size)*

The entire front door assembly swings open for cleaning. A removable perforated interior bottom panel is easily removed to make cleaning an easy task. For best results, the cabinet interior should be cleaned daily.

The "El Primo" TCD-1 has

double pan **access door** that opens to form a shelf, easing the loading of chips and reducing breakage or spills. A special interior baffle directs the flow of chips from the rear to the front ensuring the chips you serve will always be in peak condition.

Warranty:

Texican Specialty Products, hereinafter referred to as the seller, warrants equipment manufactured by it to be free from defects in materials and workmanship for which it is responsible. Seller will be responsible for all labor 90 days after date of original installation and one full year for parts. The seller, however, will not be responsible for customer abuse, physical damage or misuse of the equipment.

Repairs will generally be performed by approved/authorized service agencies.

Electrical service:

120/60/1 13.6 amps 8'- 0" cord and plug.

Crated weight: 150 lbs.



Specialty Products, Inc. 10900 Brittmoore Pk. Dr. Houston, TX 77041 713.896.9924 Fax: 713.896.9925